
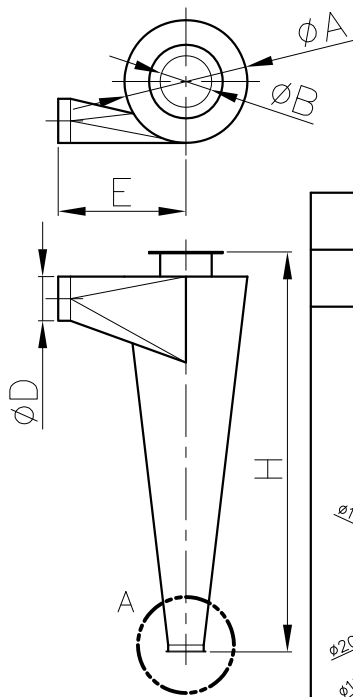


Pérdida de carga ( $\Delta P$ ): [mBAR]

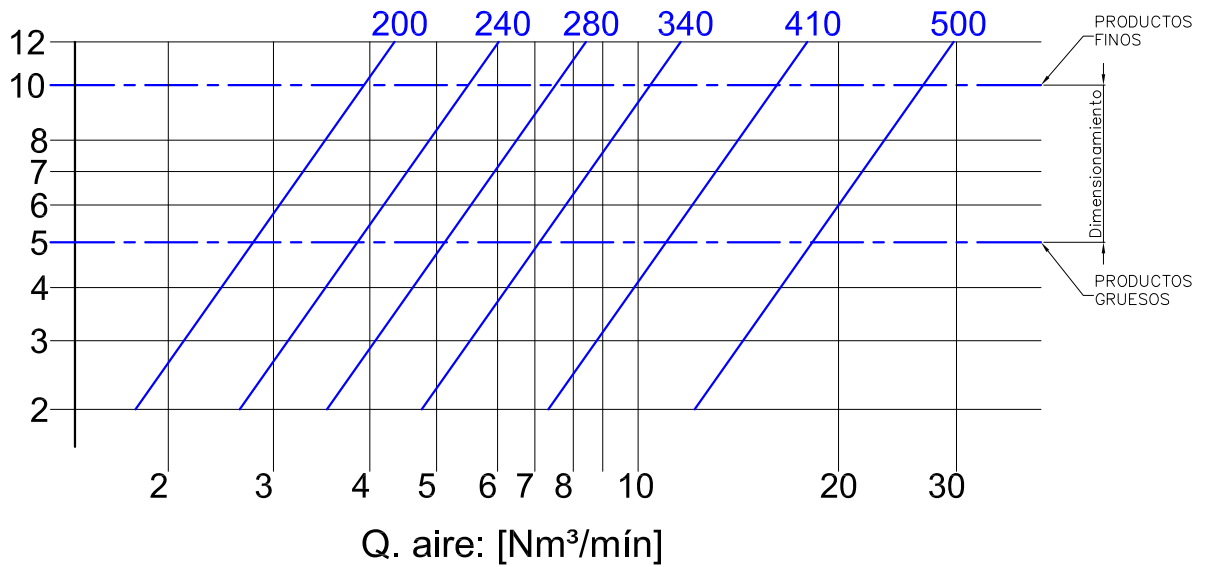

DETALLE A: Brida empalme con visores VDC		
VDC-130	VDC-180	VDC-250

CNT-500	500	180	127 a 170	330	1350	20
CNT-410	410	150	102 a 140	290	800	15
CNT-340	340	120	89 a 127	260	800	13
CNT-280	280	100	76 a 102	240	800	12
CNT-240	240	80	57 a 89	220	800	10
CNT-200	200	65	51 a 76	200	800	8
MODELO:	ØA	ØB	ØD	E	H	Peso [Kg]

Nos reservamos el derecho de modificar diseños, materiales y datos sin indicación previa



**TECNOMILLS**

Denominación:

CICLONETA PARA TRANSPORTE  
NEUMÁTICO